

# PEG

## 10

### USES



FOR VALVE SEATS from 20 to 65 mm Ø

Weight	Kg. 4,6
Dimensions	mm 110x280
Grinding Wheel Speed	11.000 R.P.M.
Relative Movement	27 R.P.M.
Fixed Eccentricity	2.5 mm
Motor Power	350 Watt
Voltage	220 Volt single phase (or as requested)

### PEG 10 UNIVERSAL KIT

Peg 10 Valve Seat Grinder  
Grinding Wheel Dressing Stand  
15 Self Centering Pilots:  
at 7 - 8 - 9 - 10 - 11 - 12- 8 - 9 mm  
9/32" - 5/16" - 11/32" - 3/8" - 13/32" - 7/16 - 1/2"  
diameters.

9 45° Silicon Carbide Grinding Wheels  
at 26 ÷ 63 mm diameter.

9 Corundum Grinding Wheels  
at 26 ÷ 63 mm diameter.

9 Silicon Carbide Grinding Wheels  
at 26 ÷ 63 mm diameter.

4 15° Silicon Carbide Grinding Wheels  
at 25 ÷ 45 mm diameters.

Total Weight: Approx. 16,5 Kgs

### PEG 10 STANDARD KIT

Peg 10 Valve Seat Grinder.  
Grinding Wheel Dressing Stand.  
N. 5 Self Centering Pilots  
at 7, 8, 9, 10 11 mm diameters.  
9 45° Silicon Carbide Grinding Wheels  
at 26 ÷ 63 mm diameters.  
Total Weight: Approx 10 Kgs



# PEG

## 125

### USES



FOR VALVE SEATS from 50 to 120 mm Ø


Weight	Kg 7
Dimensions	mm 130x320
Grinding Wheel Speed	5.500 R.P.M.
Relative Movement	12 R.P.M.
Fixed Eccentricity	3 mm
Motor Power	600 Watt
Voltage	220 Volt single phase (or as requested)

### PEG 125 STANDARD KIT

Peg 125 Valve Seat Grinder.  
4 Self Centering Pilots at 16- 18 - 19 - 20 mm diameters  
in special hardened steel. Surface hardness 60 HRc.  
8 Wheels at 70 - 80 - 90 - 100 - 110 - 120 mm diameters  
with hub 110 - 120 mm diameters without hub.



Postbus 119  
4793 ZJ Fijnaart Nederland  
@ : fff@fff.nl

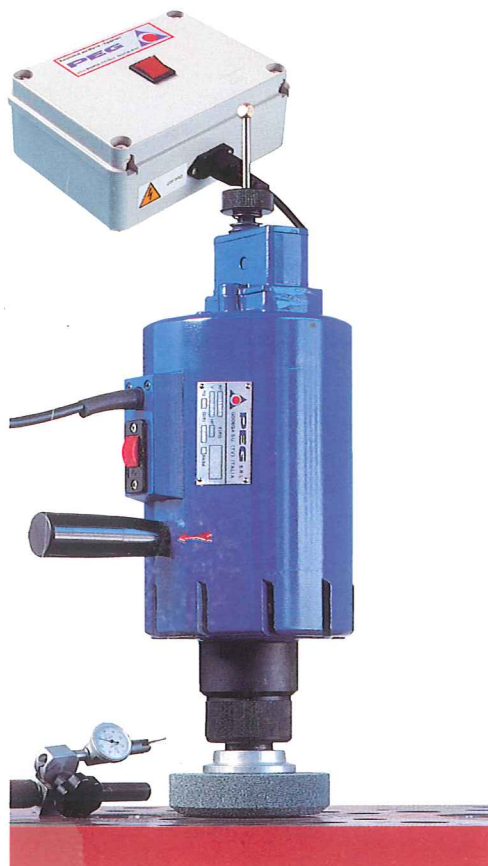

# PEG

## 175 VARIOMATIC

### USES



FOR VALVE SEATS from 70 to 180 mm Ø

Weight	Kg 7,5
Dimensions	mm 130x320
Grinding Wheel Speed	2.800/5.600 R.P.M..
Relative Movement	8/16 R.P.M.
Fixed Eccentricity	3 mm.
Motor Power	Watt 1.300
Voltage	Volt 220 (or as requested)

### PEG 175 STANDARD KIT

Pilot pins and grindwheels, with or without hubs, on request.

Self centering pilots in special hardened steel.

Surface hardness 60 HRc.

